




# WD40-75 Series

DC/DC 宽压输入 40-75W (DC/DC wide input 40-75W)

## Typical performance

- ⊙ Wide Input voltage range (2:1 or 4:1)
- ⊙ Typical Efficiency: 85%
- ⊙ Switching frequency: 300KHz ± 30 KHz
- ⊙ Overcurrent/Short circuit protection, Self-furbish
- ⊙ Input-output isolate (500/1000/1500/2000Vdc)
- ⊙ PCB Board in-line type installs

## Temperature graph

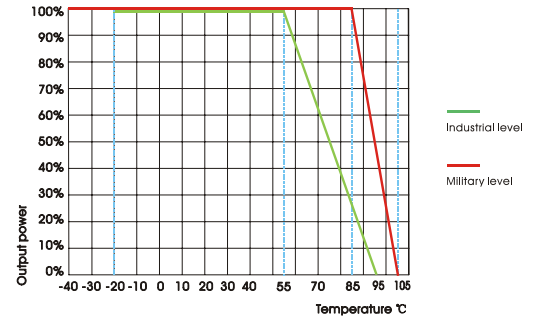

**Technology parameter** Test condition: General Nominal Line, Tc=25°C, Rated resistant load unless other wispecified

Input Features	Min	Nom	Max	Notes
Input voltage(Vdc)	9	12	18	W 2:1
	18	24	36	W 2:1
	36	48	72	W 2:1
	72	110	145	W 2:1
	10	12	36	W 4:1
	18	48	72	W 4:1
Turn on voltage	3.5Vdc		+Vin	converter guaranteed on when REM pin is left open
Turn off voltage	0		0.3Vdc	
Under voltage protect				

## Output Features

Voltage accuracy		Vo1;Vo2,Vo3	±1.0%, ±2.0%
Line regulation		Vo1;Vo2,Vo3	±0.2%, ±1.5%
Load regulation	20% ~ 100%	Vo1;Vo2,Vo3	±0.5%, ±4.0%
Ripple and noise	20MHz BM Vo≤5.0V, ≤50mVp-p; Vo≥48V, ≤180mVp-p; Other, ≤100mVp-p;		
Dynamic response	25%	ΔVo1/Δt	±4.0/500us%
Voltage adjust	Standard output voltage	TRIM	±10% (adjustable)
Start delay time	typical		≤200mS

## General Features

Efficiency	Normal input , full load	Vo≤5.0V,80% typical	Vo>5.0V, 87% typical
Switching frequency		300KHz typical	Max 330KHz
Operating temperature	Free air	Industrial level	-25℃ ~ +55℃
Storage temperature		-40℃ ~ +105℃	
Max case temperature		+95℃	
Relative humidity			10%~90%
case material		Metal case	
Isolation Voltage	500/1000/1500/2000 Vdc ≤0.5mA/1min, 500Vdc ≤0.5mA/1min		
MTBF	2X10 <sup>5</sup> Hrs		

## Product Nomination Method


example	W D 25 - 48 S 05 J		
	① ② ③	④ ⑤ ⑥ ⑦	
①	Wide input voltage: 2: 1	⑥	output voltage
②	Power adaptation mode: D (DC-DC)	⑦	J:military level,Non:Industry level
③	Output power(W)		G:input-output Isolate
④	Normal input voltage		I: Dual Route output Isolate
⑤	S=Single route output, D=Dual route output, T=Triple route output, Q=Quadruple output		W:Super Wide input voltage

## Typical product tabulates

TYPE	Input voltage range	Output voltage / current					
		VO1		VO2		VO3	
		V	mA	V	mA	V	mA
WD40-□S05	12 V (9~18V)	5V	8000 mA				
WD40-□S12	24V (18~36V) 48V (36~72V)	12V	3300 mA				
WD40-□S15	110V (72~144V)	15V	2670 mA				
WD40-□S24	12V (10~36V) W 48V (18~72V) W	24V	1660 mA				
WD40-□D05		+5V	4000 mA	-5V	4000 mA		
WD40-□D12		+12V	1660 mA	-12V	1660 mA		
WD50-□S05		5V	10000mA				
WD50-□S12		12V	4200mA				
WD50-□S15		15V	3300mA				
WD50-□S24		24V	2100mA				
WD50-□D05		+5V	5000mA	-5V	5000mA		

WD50-□D12		+12V	2100mA	-12V	2100mA		
WD75-□S05		5V	15000mA				
WD75-□S12		12V	6250mA				
WD75-□S15		15V	5000mA				
WD75-□S24		24V	3125mA				
WD75-□D05		+5V	7500mA	-5V	7500mA		
WD75-□D12		+12V	3125mA	-12V	3125mA		

### Mechanical Data

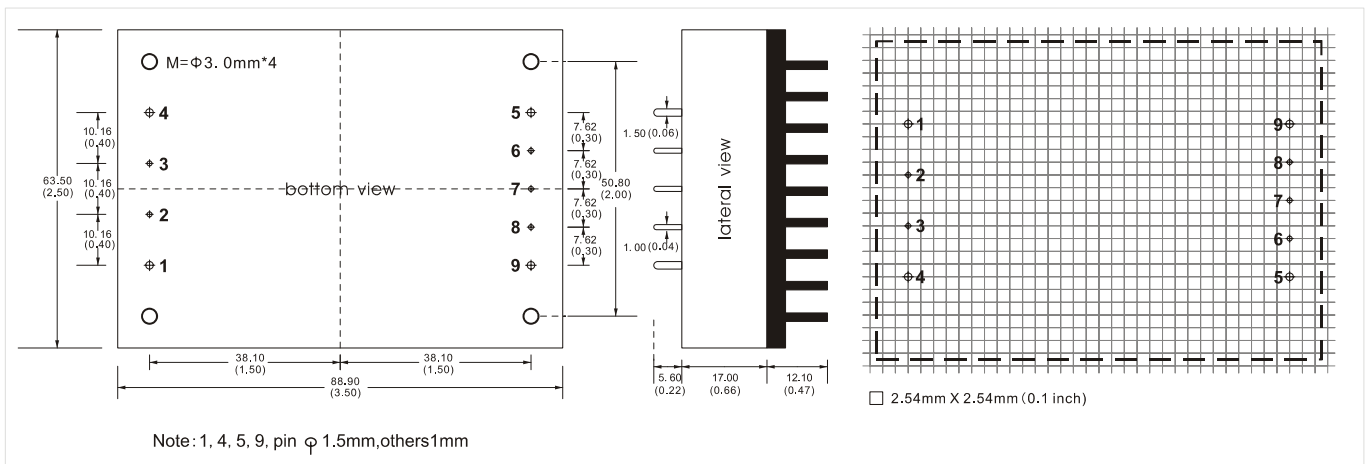

### Mechanical Data

Packing	L x W x H : mm	Packing No.
M3	88.90 x 63.50 x 17.00	350250DC

### Pin Assignments

PIN	1	2	3	4	5	6	7	8	9
S	-Vin	REM	CASE	+Vin	+Vout	+S	TRIM	-S	GND

\*Note: The power modules such as the definition of the pin does not match with the hand book, please refer to the actual item.