

# IPU 16A SERIES

## 15W Desk Top Switching Power Supplies For Industrial Equipment

### Description:

The IPU16A series of AC/DC switching mode power supplies provide 15 Watts of continuous output power and is well-suited for a variety of applications. All supplies are UL 94V-1 min compliant. All model meet FCC Part-15 class B and CISPR-22 class B emission Limits and are designed to comply with UL/c-UL(UL 60950-1), TUV/GS(EN 60950-1) and new CE requirements. All units are 100% burned-in and tested.



### Features:

- Wide Input Voltage 90 to 264VAC, 47 to 63 Hz
- IEC-320-C14 Input Inlet
- Optional Output Connector (See appendix)
- Single Output
- Energy Star 2.0, Efficiency level V
- Class I
- Operating temperature -20~70°C
- 3 year warranty

### Safety Approvals:



### Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit	
Vin	Input Voltage	Operating Voltage	90		264	VAC	
fin	Input Frequency		47		63	Hz	
Po	Output Power Range	Vin=90 to 264VAC			15	W	
Vo	Output Voltage Range		See rating chart			V	
Io	Output Current Range		See rating chart			A	
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC			0.4	A	
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC			0.26	A	
Irl	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC		12	15	A	
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC		26	30	A	
Eff	Efficiency	Io=Full Load, Vin=230VAC	72		85	%	
REG-i	Line Regulation	Io=Full Load		0.5	1	%	
REG-o	Load Regulation	Vin=230VAC		3	10	%	
OVP	Over Voltage Protection		Nil			%	
OCP	Over Current Protection	Nil. But, Output protected to short circuit conditions					%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC			4	mS	
Thold	Hold-Up Time	Io=Full Load, Vin=110VAC	5			mS	
Ts	Start Up Time	Io=Full Load, Vin=100VAC	0.3	1	2	S	
Vrn	Ripple & Noise (Peak to Peak)	Full Load, Vin=90VAC		0.5	1	%	
Ilk	Safety Ground Leakage Current	Io=Full Load, Vin=240VAC		0.5	0.75	mA	
TC	Temperature Coefficient	All output	-0.04		0.04	%/°C	
Pno	No-Load Power Consumption	No load, Vin=240VAC	0	0.4	0.5	W	

\* Note: The Ripple & Noise which is under 3.3VCD at 2% max

### Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		-20		70	°C
Tstg	Storage Temperature		-40		85	°C
Hr	Relative Humidity		5		95	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1M			Hrs
Pd	Derate linearly from 100% load at 40°C to 50% load at 70°C					

# IPU 16A SERIES

## 15W Desk Top Switching Power Supplies For Industrial Equipment

### Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242			VDC
Vpg	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2121			VDC
Ris	Isolation Resistance	Test Voltage=500VDC	50			M Ω
CISPR	EMI requirements for CISPR-22	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-15	Vin=110VAC	B			CLASS

### Output Voltage And Current Rating Chart ( Single Output ) :


Model Number	Output Voltage	Output Current	Total Regulation	Maximum Output Power
IPU16A-101	3 ~ 5 VDC	2.50 A max	7%	12W
* IPU16A-102	5 ~ 6 VDC	2.50 ~ 2.00 A	5%	12W
* IPU16A-103	6 ~ 8 VDC	2.00 ~ 1.50 A	5%	12W
* IPU16A-104	8 ~ 11 VDC	1.87 ~ 1.36 A	5%	15W
* IPU16A-105	11 ~ 13 VDC	1.36 ~ 1.15 A	5%	15W
* IPU16A-106	13 ~ 16 VDC	1.15 ~ 0.94 A	5%	15W
* IPU16A-107	16 ~ 21 VDC	0.94 ~ 0.72 A	5%	15W
* IPU16A-108	21 ~ 27 VDC	0.72 ~ 0.55 A	5%	15W
* IPU16A-109	27 ~ 33 VDC	0.55 ~ 0.45 A	5%	15W
* IPU16A-110	33 ~ 40 VDC	0.45 ~ 0.37 A	3%	15W
* IPU16A-111	40 ~ 48 VDC	0.37 ~ 0.31 A	3%	15W

Mark " \* " means approved by TUV/PSE.

The model number of 101 had been approved by CEC level IV.

The model number of 102~111 had been approved by CEC level V.

### Mechanical Specifications :

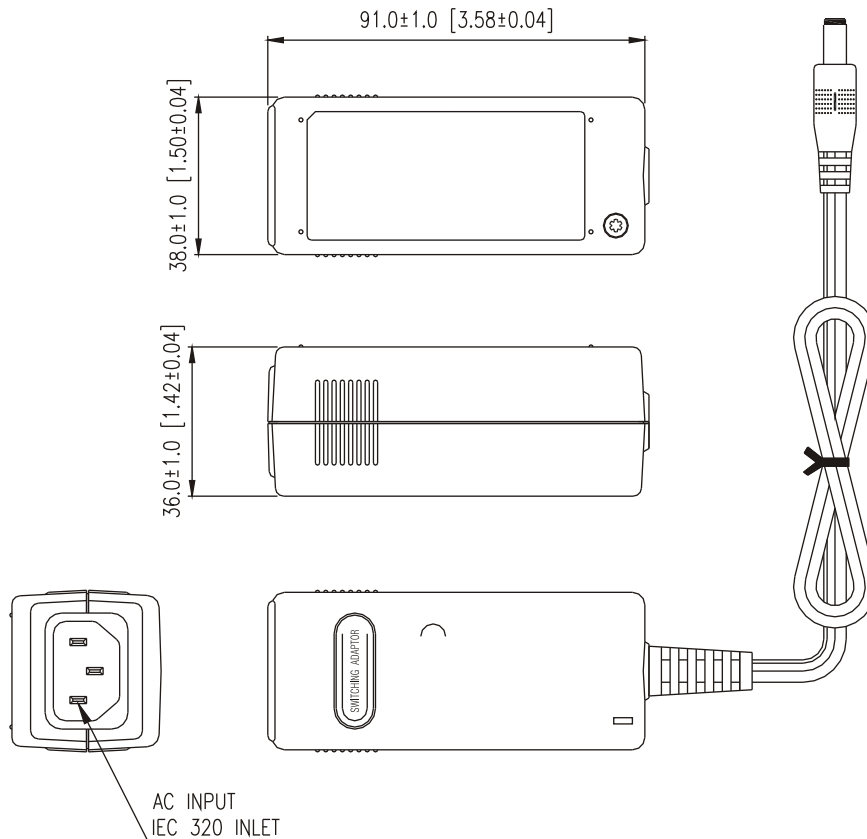

- Note:
1. Dimensions are shown in mm.
  2. Weight: 165gs approx.
  3. Optional output connector: See page Appendix.