

IUU62 SERIES

63W U-bracket switching power supplies for Industrial Equipment

Description:

The IUU62 series of compact, open frame constructed, AC/DC or DC/DC switching mode power supplies provide 63 Watts of continuous output power. They are suited for use in industrial instrument and many other applications, all models are designed to meet the safety requirements of UL/c-UL(UL 60950-1:2nd Edition), TUV-Bauart(EN60950-1:2nd Edition) and new CE requirements. All units are 100% burned in and tested.

Features:

- Wide Operating Voltage 81 to 280 VAC, 47 to 400 Hz or 90 to 420VDC
- Internal EMI filter
- Single to Quad Output
- Input connector mates with Molex housing 09-52-4054 and Molex 2478 series crimp terminal
- Output connector mates with Molex housing 09-52-4084 and Molex 2478 series crimp terminal
- Size: 3.2"x5"x1.38"
- Class I
- Power Fail Detect (Optional)
- Operating temperature -20~70°C
- 3 year warranty



Safety Approvals :



Electrical Characteristics:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vin	Input Voltage	Universal Input Voltage	90		264	VAC
			106		250	VDC
		Operating Voltage	81		280	VAC
			90		420	VDC
fin	Input Frequency		47		400	Hz
Po	Output Power Range	Vin= Operating Voltage	0		63	W
Vo	Output Voltage Range		See rating Chart			V
Io	Output Current Range		See rating Chart			A
Iil	Input Current (Low Line)	Io=Full load, Vin=115VAC or 160VDC			1.6	A
Iih	Input Current (High Line)	Io=Full load, Vin=230VAC or 325VDC			1.0	A
Irl	Low Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=115VAC or 160VDC		32	35	A
Irh	High Line Inrush Current	Io=Full load, 25°C, Cool start, Vin=230VAC or 325VDC		65	70	A
Eff	Efficiency	Io=Full load, Vin=230VAC or 325VDC	See rating Chart			%
REG-i	Line Regulation	Io=Full load		0.5	1	%
REG-o	Load Regulation	Vin=230VAC or 325VDC		3	5	%
OVP	Over Voltage Protection		112		132	%
OCP	Over Current Protection		110		150	%
Ttr	Time of Transient Response	Io=Full Load to Half Load, Vin=100VAC or 140VDC			5	mS
Thold	Hold-Up Time	Io=Full Load, Vin=110VAC or 160VDC	16			mS
Ts	Start Up Time	Io=Full Load, Vin=100VAC or 140VDC	0.3	1	2	S
* Vp-p	Ripple & Noise (Peak to Peak)	Full Load, Vin=85VAC or 100VDC		0.5	1	%
Ilk	Safety Ground Leakage Current	Io=Full Load, Vin=240VAC		0.4	0.45	mA
TC	Temperature Coefficient	All output	-0.05		0.05	%/°C
Pno	No-Load Power Consumption	No load, Vin=230VAC	See rating Chart			W

* Note: The Ripple & Noise which is under 3.3VDC at 2% max

Environmental :

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Toper	Operating Temperature		-20	50	70	°C
Tstg	Storage Temperature		-40		85	°C
Ho	Operating Humidity		0		95	%
Hr	Storage Humidity		0		95	%
MTBF	Operating Temperature at 25°C, Calculated per MIL-HDBK-217F		0.1M			Hrs
Pd	Derate linearly from 100% load at 50°C to 50% load at 70°C					

Safety Specifications:

Sym.	Parameter	Test Conditions	Min.	Typ.	Max.	Unit
Vps	Dielectric Withstanding Voltage for Primary to secondary	Primary to secondary	4242			VDC
Vpg	Dielectric Withstanding Voltage for Primary to Ground	Primary to ground	2121			VDC
Ris	Isolation Resistance	Test Voltage=500VDC	50			MΩ
CISPR	EMI requirements for CISPR-22	Vin=220VAC	B			CLASS
FCC	EMI requirements for FCC PART-15	Vin=120VAC	B			CLASS

IUU62 SERIES


63W U-bracket switching power supplies for Industrial Equipment Output Voltage And Current Rating Chart (Single Output) :

Model Number	Output Voltage	Output Current	Total Regulation	Efficiency (min.)	Maximum Output Power	Pno (max.)
IUU62-101	3 - 5 VDC	16.66 - 10.0 A	5%	70%	50W	2W
IUU62-102	5 - 6 VDC	11.0 - 9.16 A	5%	70%	55W	
IUU62-103	6 - 8 VDC	10.0 - 7.50 A	5%	70%	60W	
IUU62-104	8 - 11 VDC	7.87 - 5.72 A	3%	70%	63W	
IUU62-105	11 - 13 VDC	5.72 - 4.84 A	3%	70%	63W	
IUU62-105-1	11 - 13 VDC	4.00 - 3.46 A	3%	70%	45W	
IUU62-106	13 - 16 VDC	4.84 - 3.93 A	3%	70%	63W	
IUU62-107	16 - 21 VDC	3.93 - 3.00 A	3%	70%	63W	
IUU62-108	21 - 27 VDC	3.00 - 2.33 A	2%	70%	63W	
IUU62-109	27 - 33 VDC	2.33 - 1.90 A	2%	70%	63W	
IUU62-110	33 - 40 VDC	1.90 - 1.57 A	2%	70%	63W	
IUU62-111	40 - 48 VDC	1.57 - 1.31 A	2%	70%	63W	

Output Voltage And Current Rating Chart (Multi Output) :

Model Number	Output #1				Output #2				Output #3				Output #4				Eff. (min.)	Max. Output Power	Pno (max.)
	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax	Vonom	Iomin	Iomax	Regmax			
IUU62-200	+3.3V	1.4A	7A	6%	+12V	0.6A	3A	5%									70%	59.1W	2W
IUU62-201	+5V	0.7A	7A	5%	+12V	0.3A	3A	5%									70%	63W	
IUU62-202	+5V	0.7A	7A	5%	+15V	0.3A	3A	5%									70%	63W	
IUU62-203	+5V	0.7A	7A	5%	+24V	0.4A	2A	5%									70%	63W	
IUU62-204	+3.3V	1.4A	7A	6%	+5V	0.5A	5A	5%									70%	48.1W	
IUU62-215	+5V	1.4A	7A	5%					-24V	0.2A	2A	5%					70%	63W	
IUU62-300	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					70%	63W	
IUU62-300-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					70%	63W	
IUU62-301	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-5V	0A	0.8A	5%					70%	63W	
IUU62-301-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+5V	0A	0.8A	5%					70%	63W	
IUU62-302	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%					70%	63W	
IUU62-302-1	+5V	0.6A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%					70%	63W	
IUU62-303	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%					70%	63W	
IUU62-303-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%					70%	63W	
IUU62-305	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	-12V	0A	0.8A	5%					70%	63W	
IUU62-305-1	+5V	1.2A	6A	5%	+24V	0.4A	2A	5%	+12V	0A	0.8A	5%					70%	63W	
IUU62-306	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-5V	0A	0.8A	5%					70%	59.8W	
IUU62-306-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+5V	0A	0.8A	5%					70%	59.8W	
IUU62-308	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	-12V	0A	1A	5%					70%	53.5W	
IUU62-308-1	+3.3V	0.5A	5A	6%	+5V	0.5A	5A	5%	+12V	0A	1A	5%					70%	53.5W	
IUU62-400	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	70%	63W	
IUU62-400-1	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	70%	63W	
IUU62-400-2	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	70%	63W	
IUU62-400-3	+3.3V	1.2A	6A	6%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	70%	63W	
IUU62-401	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	-5V	0A	0.8A	5%	70%	63W	
IUU62-401-1	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	-12V	0A	0.8A	5%	+5V	0A	0.8A	5%	70%	63W	
IUU62-401-2	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	-5V	0A	0.8A	5%	70%	63W	
IUU62-401-3	+5V	0.6A	6A	5%	+12V	0.3A	3A	5%	+12V	0A	0.8A	5%	+5V	0A	0.8A	5%	70%	63W	
IUU62-402	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-12V	0A	0.8A	5%	70%	63W	
IUU62-402-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+12V	0A	0.8A	5%	70%	63W	
IUU62-402-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-12V	0A	0.8A	5%	70%	63W	
IUU62-402-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+12V	0A	0.8A	5%	70%	63W	
IUU62-403	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	-24V	0A	0.8A	5%	70%	63W	
IUU62-403-1	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	-12V	0A	0.8A	5%	+24V	0A	0.8A	5%	70%	63W	
IUU62-403-2	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	-24V	0A	0.8A	5%	70%	63W	
IUU62-403-3	+5V	1.2A	6A	5%	+12V	0.6A	3A	5%	+12V	0A	0.8A	5%	+24V	0A	0.8A	5%	70%	63W	
IUU62-404	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	-5V	0A	0.8A	5%	70%	63W	
IUU62-404-1	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	-15V	0A	0.8A	5%	+5V	0A	0.8A	5%	70%	63W	
IUU62-404-2	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	-5V	0A	0.8A	5%	70%	63W	
IUU62-404-3	+5V	0.6A	6A	5%	+15V	0.3A	3A	5%	+15V	0A	0.8A	5%	+5V	0A	0.8A	5%	70%	63W	

Mechanical Specifications :

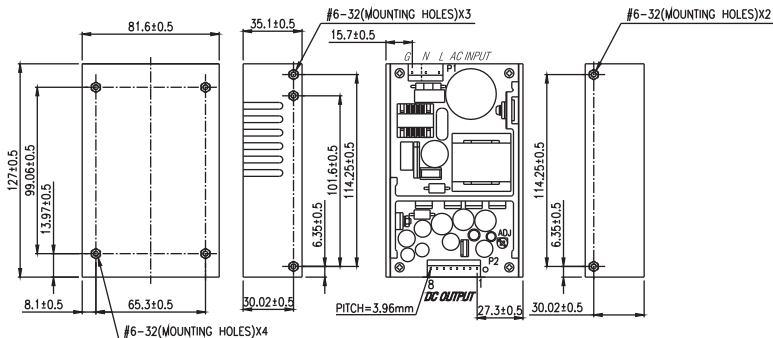

PIN CHART

PIN	1	2	3	4	5	6	7	8
MODEL								(Optional)
IUU62-1XX	OUT	OUT	OUT	RTN	RTN	RTN	RTN	PFD
IUU62-2XX	Vo2	Vo1	Vo1	COM	COM	N/C	N/C	PFD
IUU62-215	N/C	Vo1	Vo1	COM	COM	Vo3	N/C	PFD
IUU62-3XX	Vo2	Vo1	Vo1	COM	COM	Vo3	N/C	PFD
IUU62-4XX	Vo2	Vo1	Vo1	COM	COM	Vo3	Vo4	PFD

Note: Vo1:Output#1 Vo2:Output#2 Vo3:Output#3 Vo4:Output#4

Note:

1. Dimensions are shown in inches or mm.
2. Weight: 425gs approx.
3. Input connector mates with Molex housing 09-52-4054 and Molex 2478 series crimp terminal.
4. Output connector mates with Molex housing 09-52-4084 and Molex 2478 series crimp terminal.