

Input Ranges :
9-75 VDC

Output Output:
Single Output
3.3V - 24V

Bipolar Output
±5.0V, ±12V, ±15V

Triple Output
+5.0V / ±12V,
+5.0V / ±15V

Output Power:
16 - 30 W



The L DC-DC converters feature high power density, high efficiency and excellent line & load regulation. Using innovative design technique, state-of-the art Current Mode PWM control, and Surface Mount packaging & manufacturing technology, the L series provides up to 30 watts of well regulated power in a encapsulated 2.56" x 3.0" x 0.40" metal case with six-sided EMI/RFI shielding. Automatic feed forward compensation, pulse-by-pulse current limiting, and output short circuit protection are standard for all models.

These converters are designed for wide input range telecommunications, industrial and instrument applications. The wide input range (2:1 & 4:1) is ideal for battery or unregulated input applications.

No external components are needed for normal operation. Low ESR capacitors are used to minimize the conductive noise. This package is ideal for all I/O board system and distributed DC power configurations.

FEATURES

General:

- Small footprint : 2.56" x 3.0"
- Current-Mode Control
- Input/Output Isolation
- Input Voltage from 9 to 75Vdc
- 2:1 & 4:1 Input Voltage Range
- High conversion efficiency: 80%
- Line & load regulation to ±1.0%
- Fixed operating frequency
- Six-Sided Shielding

Isolation:

- Isolation Voltage >500V

APPLICATIONS

- Distributed Power Systems
- Workstations
- Computer Equipment
- Communications Equipment

TABLE OF CONTENTS :

General Specifications	2
Single Output	4
Bipolar Output	6
Triple Output.....	8

1. Absolute Maximum Ratings

Stresses in excess of the absolute maximum ratings can cause performance degradation, adversely effect longterm reliability, and cause permanent damage to the device.

Parameter	Conditions / Description	Min	Max	Units
Input Voltage				
Continuous	12	-0.3	20	Vdc
	24	-0.3	38	Vdc
	48	-0.3	78	Vdc
	W24	-0.3	38	Vdc
	W48	-0.3	78	Vdc
Transient (100mSec.)	12	-0.3	22	Vdc
	24	-0.3	40	Vdc
	48	-0.3	80	Vdc
	W-24	-0.3	40	Vdc
	W-48	-0.3	80	Vdc
Operating Temperature	All models, base plate temperature	-40	+95	°C
Storage Temperature	Ambient	-55	+105	°C
Isolation Voltage	Input to Output		+700	Vdc

2. Input Specifications

Parameter	Conditions / Description	Min	Nom	Max	Units
Input Voltage					
Voltage Range (Continuous)	12	9	12	18	Vdc
	24	18	24	36	Vdc
	48	36	48	75	Vdc
	W-24	10	24	36	Vdc
	W-48	20	48	75	Vdc

3. Enable (On-Off Control)

Parameter	Conditions / Description	Min	Nom	Max	Units
Enable Pin					
Open Circuit Voltage			5		Vdc
Source Current				1	mA
Positive Logic	Standard				
On-Control	Logic High or Floating	5.0		18	Vdc
Off-Control		-0.5		1.8	Vdc
Negative Logic	Not Available				

* Enable pin can be left floating if not used.

4. Output Specifications

Parameter	Conditions / Description	Min	Nom	Max	Units
Voltage Accuracy	Please see table				%
Output Current	Please see table				Adc
Output Trim	Not Available				%Vout
Over Voltage Protection	Not available				Vdc
Line Regulation				±1.0	%Vout
Load Regulation				±1.0	%Vout
Transient Respoonse	50% ± 25% step load change		400		µSec.
Ripple & Noise	Please see table				mVp-p
Switching Frequency			200		KHz

5. Output Trim

Parameter	Conditions / Description	Min	Nom	Max	Units
Negative Trim	Standard				
Trim Up	Trim Pin to (-)Vout			10	%Vdc
Trim Down	Trim Pin to (+)Vout	10			%Vdc
Positive Trim	Not Available				

* Trim pin can be left floating if not used

6. Environmental and Mechanical Specifications


Parameter	Conditions / Description	Min	Nom	Max	Units
Operating Temperature	PCB Temperature	-40		+95	°C
Storage Temperature		-55		+105	°C
Temperature Coefficient				±0.02	%/°C
Shock	Halfsine wave, 3 axes	50			g
Sinusoidal Vibration	GR-63-CORE, Section 5.4.2	1			g
Humidity	Relative Humidity, Non-Condensing			95	%R.H.
Weight			6.7 (190)		Oz (g)
MTBF (calculated)	Bellcore TR-NWT-000332 method 1 - parts count	0.5			MHrs

7. Isolation Specifications

Parameter	Conditions / Description	Min	Nom	Max	Units
Isolation Voltage					
Input to Output		500			Vdc
I/O to Case		500			Vdc
Isolation Resistance	Input to Output	10			MΩ
Isolation Capacitance	Input to Output		3		nF

INPUT		OUTPUT								EFF. (typ.)	MODEL NO.
Nominal (Range)	Max. Output Power	Voltage (V)			Current (A)		Ripple & Noise		Over Load Protection		
		Set Point	Min.*	Max.*	Min.	Max.	Peak-Peak	R.M.S.			
12 (9 - 18)	16W	3.30	3.20	3.40	0.5	5.0	50mV	10mV	Pulse by Pulse Current Limiting	78%	L25S1203
	25W	5.00	4.90	5.10	0.5	5.0	75mV	15mV		82%	L25S1205
	30W	12.0	11.88	12.12	0.25	2.5	100mV	25mV		84%	L30S1212
	30W	15.0	14.85	15.15	0.2	2.0	120mV	30mV		84%	L30S1215
	30W	24.0	23.76	24.24	0.12	1.25	200mV	40mV		84%	L30S1224
24 (18 - 36)	16W	3.30	3.20	3.40	0.5	5.0	50mV	10mV		78%	L25S2403
	25W	5.00	4.90	5.10	0.5	5.0	75mV	15mV		82%	L25S2405
	30W	12.0	11.88	12.12	0.25	2.5	100mV	25mV		84%	L30S2412
	30W	15.0	14.85	15.15	0.2	2.0	120mV	30mV		84%	L30S2415
	30W	24.0	23.76	24.24	0.12	1.25	200mV	40mV		84%	L30S2424
48 (36 - 75)	26W	3.30	3.20	3.40	0.5	5.0	50mV	10mV		78%	L25S4803
	25W	5.00	4.90	5.10	0.5	5.0	75mV	15mV		82%	L25S4805
	30W	12.0	11.88	12.12	0.25	2.5	100mV	25mV		84%	L30S4812
	30W	15.0	14.85	15.15	0.2	2.0	120mV	30mV		84%	L30S4815
	30W	24.0	23.76	24.24	0.12	1.25	200mV	40mV		84%	L30S4824
W-24 (10 - 36)	16W	3.30	3.20	3.40	0.5	5.0	50mV	10mV	78%	LW25S2403	
	25W	5.00	4.90	5.10	0.5	5.0	75mV	15mV	82%	LW25S2405	
	30W	12.0	11.88	12.12	0.25	2.5	100mV	25mV	84%	LW30S2412	
	30W	15.0	14.85	15.15	0.2	2.0	120mV	30mV	84%	LW30S2415	
	30W	24.0	23.76	24.24	0.12	1.25	200mV	40mV	84%	LW30S2424	
W-48 (18 - 75)	16W	3.30	3.20	3.40	0.5	5.0	50mV	10mV	78%	LW25S4803	
	25W	5.00	4.90	5.10	0.5	5.0	75mV	15mV	82%	LW25S4805	
	30W	12.0	11.88	12.12	0.25	2.5	100mV	25mV	84%	LW30S4812	
	30W	15.0	14.85	15.15	0.2	2.0	120mV	30mV	84%	LW30S4815	
	30W	24.0	23.76	24.24	0.12	1.25	200mV	40mV	84%	LW30S4824	

* Combined Line & Load Regulation.

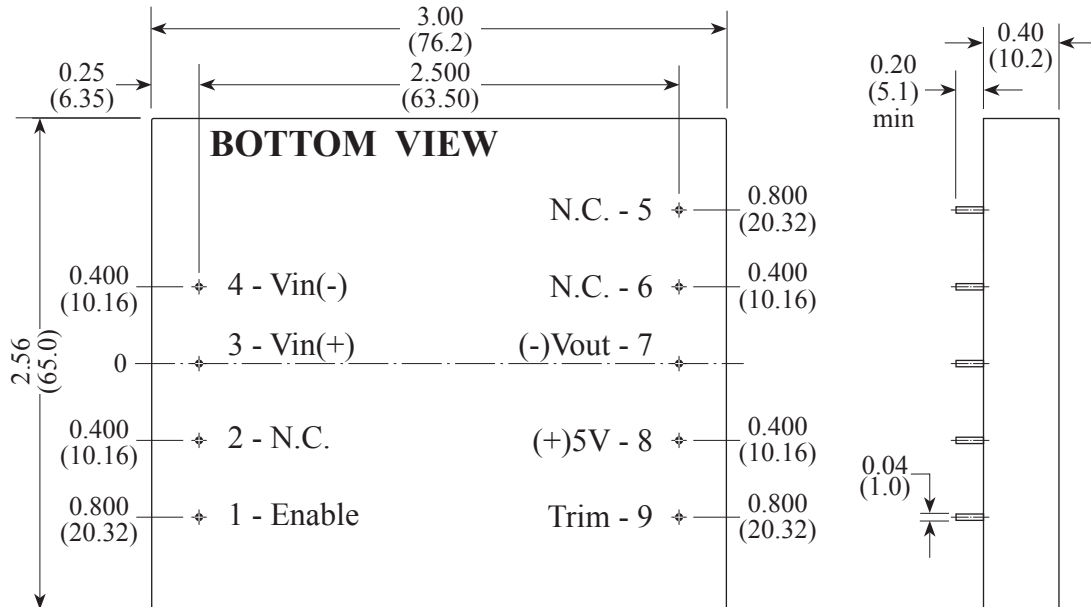

Product Numbering System & Selection Guide

L	25	S	24	03	
Series No.	Output Power	No Output	Input Voltage	Output Voltage	Options
L	25 : 25W 30 : 30W	S : Single	12 : 10-20V 24 : 18-36V 48 : 36-75V	03 : 3.3V 05 : 5.0V 12 : 12V 15 : 15V 24 : 24V	
LW					
LW					


INPUT		OUTPUT										Short Circuit Protection	Over Temp. Protect	EFF. (typ.)	MODEL NO.
Nominal (Range)	Max Power (Watt)	Voltage (V)				Current (A)			Ripple & Noise						
		#	Set Point	Min.*	Max.*	#	Min.	Max.	Peak-Peak	R.M.S.					
12 (9-18)	25	±5.0V	+V1	+5.00	+4.90	+5.10	+11	+0.25	+2.5	75mV	15mV	Pulse by Pulse Current Limiting	Not Available	80%	L25D1205
			-V2	-5.00	-4.80	+5.20	-12	-0.25	-2.5	75mV	15mV			80%	L30D1212
	30	±12V	+V1	+12.00	+11.88	+12.12	+11	+0.13	+1.25	100mV	20mV			82%	L30D1215
			-V2	-12.00	-11.80	+12.20	-12	-0.13	-1.25	100mV	20mV			82%	L30D1215
	30	±15V	+V1	+15.00	+14.85	+15.15	+11	+0.1	+1.0	120mV	25mV			82%	L25D2405
			-V2	-15.00	-14.70	-15.30	-12	-0.1	-1.0	120mV	25mV			82%	L30D2412
24 (18-36)	25	±5.0V	+V1	+5.00	+4.90	+5.10	+11	+0.25	+2.5	75mV	15mV			82%	L25D2405
			-V2	-5.00	-4.80	+5.20	-12	-0.25	-2.5	75mV	15mV			82%	L30D2412
	30	±12V	+V1	+12.00	+11.88	+12.12	+11	+0.13	+1.25	100mV	20mV			84%	L30D2412
			-V2	-12.00	-11.80	+12.20	-12	-0.13	-1.25	100mV	20mV			84%	L30D2415
	30	±15V	+V1	+15.00	+14.85	+15.15	+11	+0.1	+1.0	120mV	25mV			84%	L30D2415
			-V2	-15.00	-14.70	-15.30	-12	-0.1	-1.0	120mV	25mV			82%	L25D4805
48 (36 - 75)	25	±5.0V	+V1	+5.00	+4.90	+5.10	+11	+0.25	+2.5	75mV	15mV	82%	L25D4805		
			-V2	-5.00	-4.80	+5.20	-12	-0.25	-2.5	75mV	15mV	84%	L30D4812		
	30	±12V	+V1	+12.00	+11.88	+12.12	+11	+0.13	+1.25	100mV	20mV	84%	L30D4815		
			-V2	-12.00	-11.80	+12.20	-12	-0.13	-1.25	100mV	20mV	80%	LW25D2405		
	30	±15V	+V1	+15.00	+14.85	+15.15	+11	+0.1	+1.0	120mV	25mV	82%	LW30D2412		
			-V2	-15.00	-14.70	-15.30	-12	-0.1	-1.0	120mV	25mV	82%	LW30D2415		
W-24 (10-36)	25	±5.0V	+V1	+5.00	+4.90	+5.10	+11	+0.25	+2.5	75mV	15mV	80%	LW25D4805		
			-V2	-5.00	-4.80	+5.20	-12	-0.25	-2.5	75mV	15mV	82%	LW30D4812		
	30	±12V	+V1	+12.00	+11.88	+12.12	+11	+0.13	+1.25	100mV	20mV	82%	LW30D4812		
			-V2	-12.00	-11.80	+12.20	-12	-0.13	-1.25	100mV	20mV	82%	LW30D4815		
	30	±15V	+V1	+15.00	+14.85	+15.15	+11	+0.1	+1.0	120mV	25mV	80%	LW25D4805		
			-V2	-15.00	-14.70	-15.30	-12	-0.1	-1.0	120mV	25mV	82%	LW30D4815		
W-48 (20-75)	25	±5.0V	+V1	+5.00	+4.90	+5.10	+11	+0.25	+2.5	75mV	15mV	80%	LW25D4805		
			-V2	-5.00	-4.80	+5.20	-12	-0.25	-2.5	75mV	15mV	82%	LW30D4812		
	30	±12V	+V1	+12.00	+11.88	+12.12	+11	+0.13	+1.25	100mV	20mV	82%	LW30D4812		
			-V2	-12.00	-11.80	+12.20	-12	-0.13	-1.25	100mV	20mV	82%	LW30D4815		
	30	±15V	+V1	+15.00	+14.85	+15.15	+11	+0.1	+1.0	120mV	25mV	80%	LW25D4805		
			-V2	-15.00	-14.70	-15.30	-12	-0.1	-1.0	120mV	25mV	82%	LW30D4815		

* Combined Line & Load (Low Line to High Line, Min. Load to Full Load)


Product Numbering System & Selection Guide

L	25	D	24	05	-	12				
Series No.	Output Power		No Output		Input Voltage		Output Voltage		Dual Positive Output only	
L	25 :	25W	S :	Single	12 :	10-20V	05 :	±5V	12 :	+5V & +12V
	30 :	30W			24 :	18-36V	12 :	±12V	24 :	+5V & +24V
					48 :	36-75V	15 :	±15V		
LW					24 :	10-36V				
LW					48 :	18-75V				

Bipolar Output

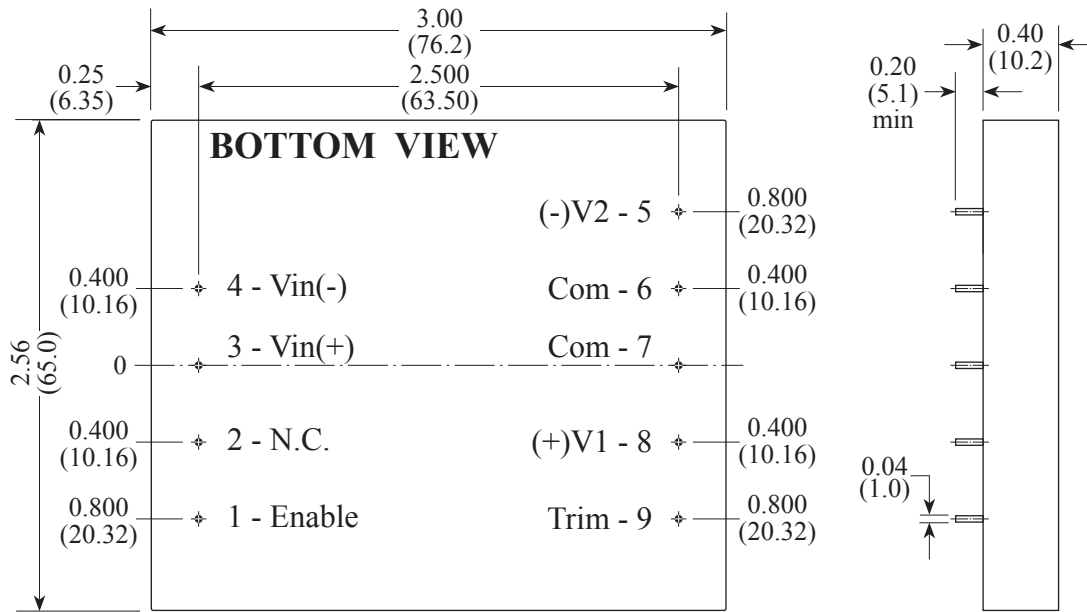

Dual Positive Output

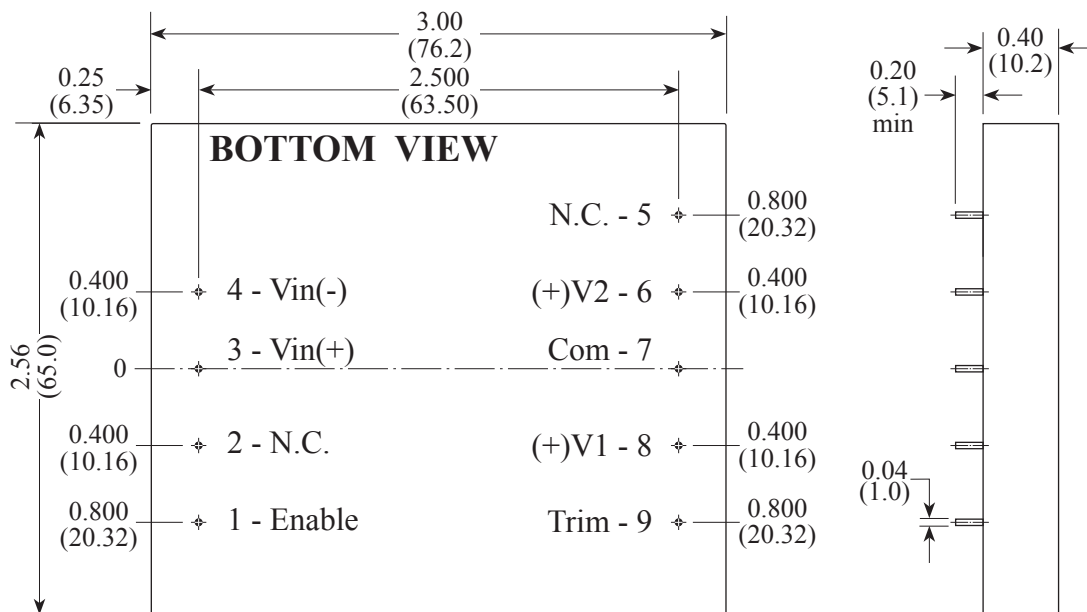


Product Numbering System & Selection Guide

L	25	D	24	05
Series No.	Output Power	No Output	Input Voltage	Output Voltage
L	25 : 25W 30 : 30W	D : Dual	12 : 10-20V 24 : 18-36V 48 : 36-75V	05 : ±5V 12 : ±12V 15 : ±15V
LW			24 : 10-36V 48 : 18-75V	

INPUT		OUTPUT										Short Circuit Protection	Over Temp. Shutdown /Recover	EFF. (typ.)	MODEL NO.				
Nominal (Range)	Max Output Power	Voltage (V)				Current (A)			Ripple & Noise										
		#	Set Point	Min.*	Max.*	#	Min.	Max.	Peak-Peak	R.M.S.									
12 (9 - 18)	30W	+5.0V ±12V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV	Pulse by Pulse Current Limiting	Not Available	82%	L30T1205-12				
			+V3	+12.0	+11.0	+13.5	+12	+0.05	+0.5	100mV	25mV								
			-V2	-12.0	-11.0	-13.5	+13	-0.05	-0.5	100mV	25mV								
	30W	+5.0V ±15V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV			82%	L30T1205-15				
			+V3	+15.0	+14.0	+16.5	+12	+0.05	+0.5	120mV	30mV								
			-V2	-15.0	-14.5	-16.5	+13	-0.05	-0.5	120mV	30mV								
24 (18 - 36)	30W	+5.0V ±12V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV			Pulse by Pulse Current Limiting	Not Available	84%	L30T2405-12		
			+V3	+12.0	+11.0	+13.5	+12	+0.05	+0.5	100mV	25mV								
			-V2	-12.0	-11.0	-13.5	+13	-0.05	-0.5	100mV	25mV								
	30W	+5.0V ±15V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV					84%	L30T2405-15		
			+V3	+15.0	+14.0	+16.5	+12	+0.05	+0.5	120mV	30mV								
			-V2	-15.0	-14.5	-16.5	+13	-0.05	-0.5	120mV	30mV								
48 (36 - 75)	30W	+5.0V ±12V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV					Pulse by Pulse Current Limiting	Not Available	84%	L30T4805-12
			+V3	+12.0	+11.0	+13.5	+12	+0.05	+0.5	100mV	25mV								
			-V2	-12.0	-11.0	-13.5	+13	-0.05	-0.5	100mV	25mV								
	30W	+5.0V ±15V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV							84%	L30T4805-15
			+V3	+15.0	+14.0	+16.5	+12	+0.05	+0.5	120mV	30mV								
			-V2	-15.0	-14.5	-16.5	+13	-0.05	-0.5	120mV	30mV								
24W (10 - 36)	30W	+5.0V ±12V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV	Pulse by Pulse Current Limiting	Not Available					82%	LW30T2405-12
			+V3	+12.0	+11.0	+13.5	+12	+0.05	+0.5	100mV	25mV								
			-V2	-12.0	-11.0	-13.5	+13	-0.05	-0.5	100mV	25mV								
	30W	+5.0V ±15V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV							82%	LW30T2405-15
			+V3	+15.0	+14.0	+16.5	+12	+0.05	+0.5	120mV	30mV								
			-V2	-15.0	-14.5	-16.5	+13	-0.05	-0.5	120mV	30mV								
48W (20 - 75)	30W	+5.0V ±12V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV			Pulse by Pulse Current Limiting	Not Available			82%	LW30T4805-12
			+V3	+12.0	+11.0	+13.5	+12	+0.05	+0.5	100mV	25mV								
			-V2	-12.0	-11.0	-13.5	+13	-0.05	-0.5	100mV	25mV								
	30W	+5.0V ±15V	+V1	+5.00	+4.90	+5.10	+11	+0.4	+4.0	75mV	15mV							82%	LW30T4805-15
			+V3	+15.0	+14.0	+16.5	+12	+0.05	+0.5	120mV	30mV								
			-V2	-15.0	-14.5	-16.5	+13	-0.05	-0.5	120mV	30mV								

* Combined Line & Load (Low Line to High Line, Min. Load to Full Load)
(+V1 is Regulated and +V2/-V2 are Semi-Regulated.

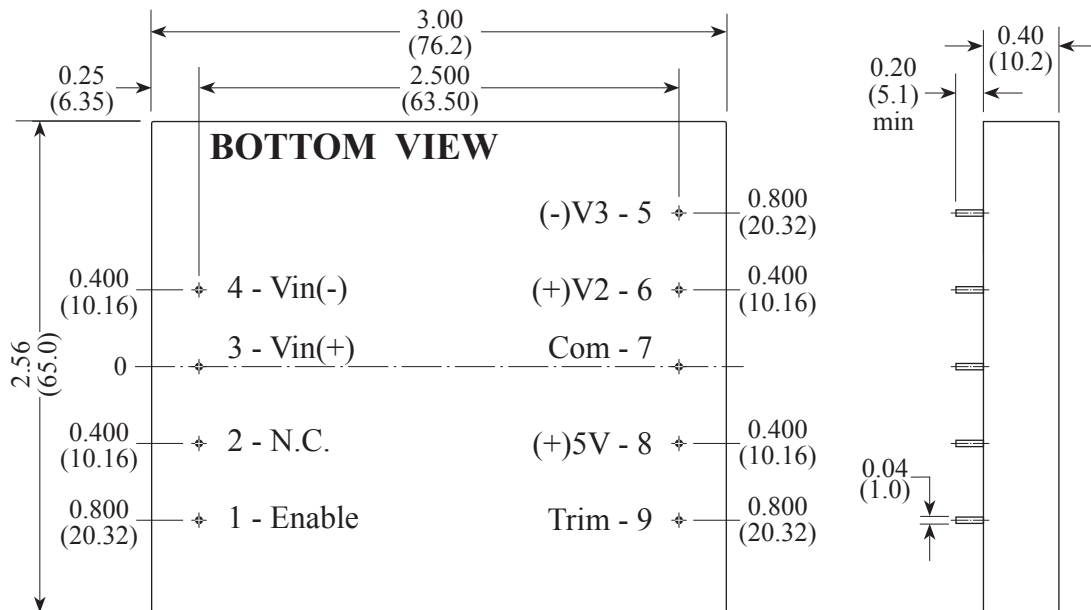

Product Numbering System

L	30	T	24	033	-	12
Series No.	Output Power	No Output		Input Voltage	+V1 Output	+V2/-V3 Outputs
L	30 : 30W	T	Triple	12 : 9-18V 24 : 18-36V 48 : 36-75V	05 : 5.0V	12 : ±12V 15 : ±15V
LW				24 : 10-36V		
LW				48 : 20-75V		