


SENSES 3155

15" TFT Cost-effective Panel Computer w/ Pentium® M Processor



- 1. SEL-
- 2. SEL+
- 3. Backlight on/off

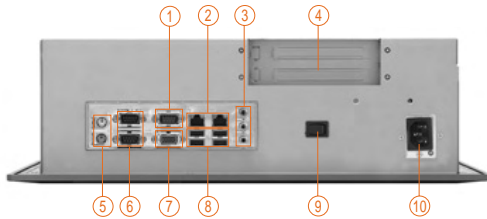

- 1. COM 3
- 2. LAN
- 3. Mic-in, Line-in, Lin-out
- 4. 2 x PCI slots
- 5. PS2 x 2 (KB/MS)
- 6. COM 1 & 2
- 7. VGA
- 8. USB 2.0 x 4
- 9. Power switch
- 10. AC power

Features

- ▶ Various I/O ports: 4 x USB2.0 and 2 x LAN
- ▶ Supports two PCI slots
- ▶ Supports embedded O.S: Windows® CE.NET and Windows® XP embedded
- ▶ Supports AC power supply
- ▶ NEMA 4/IP 65 Compliant front panel
- ▶ Supports Desktop/Panel/Rackmount



Specifications

LCD Panel	15" XGA TFT Brightness: 260nits Resolution: 1024 x 768 pixel View Angle: vertical: 100°; Horizontal: 120°
Main System	
CPU	Intel® Pentium® M 745 1.8GHZ, 400MHz FSB, 2MB cache
Chipset	Intel® 852GM + ICH 4
System	512MB DDR DIMM max up to 1GB
BIOS	Phoenix-Award 4Mbit with RPL/ PXE LAN Boot ROM, SmartView and Customer CMOS Backup
SSD	CompactFlash™ Type-II Socket
Watchdog Timer	Reset supported; 255 levels
Serial Port	RS-232 x 2 RS-232 / 422 / 485 x 1 +5V/+12V power output capability by pin 1 and pin 8, selectable via jumper setting

PS/2 Interface	PS/2 mouse x 1 PS/2 keyboard x 1
Hard Disk Drive	1 x 3.5" HDD or 2 x 2.5" HDD
USB	4 x USB ports, USB2.0 compliant
Ethernet	2 x 10/100Base-T with WOL
I/O Connectors	D-Sub 9-pin x 1 (male) for RS-232 / RS-422 / RS-485 D-Sub 9-pin x 2 (male) for RS-232 PS/2 x 2 for keyboard and mouse RJ-45 x 2 for Ethernet USB connector x 4 D-Sub 15-pin x 1 (female) for S-VGA output Line-out / Line-in / Mic-in
Power Supply	AC 90-230V, 180W
Touchscreen	Resistive
Dimensions	450 x 365 x 135.9mm (17.72" x 14.37" x 5.35")
Weight	8.8kg (19.4lb)
Environmental	Operation temperature: 0°C-45°C (32°F -113°F) Relative humidity: 10-95% @ 40°C, non-condensing Operation Vibration: 1.0G, 5-500Hz, random

Dimensions

