

Ventrix-W 4003



Features


The **Ventrix-W 4000 series** utilises an industrial single board computer and backplane architecture to provide excellent expansion capabilities, easy upgrades, reliability, repeatability and a clear 7.0 inch TFT and fitted with an integral Cherry keyboard and trackball drawer. The **Ventrix-W 4003** provides PCI and ISA expansion using PICMG 1.0 technology.

Manufactured from selected high quality industrial components, these workstations will provide a fast stable platform which will be available for a minimum of 5 years.


Our production processes are controlled under ISO 9001:2000 and every system undergoes a full diagnostic burn-in prior to shipment.

Systems can be tailored to meet your exact requirements. Each system comes with a 3 year warranty, with the first year on-site as standard.


Dimensions

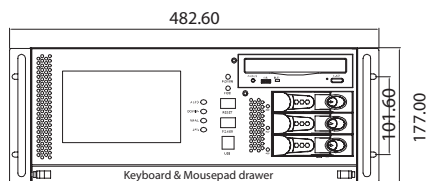


Front out-side view




Rear out-side view



Left-side View

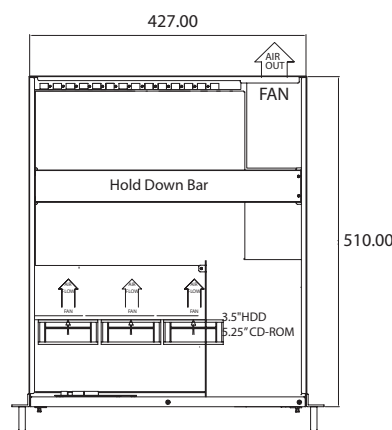

Top View

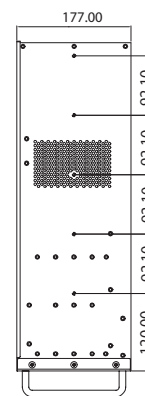

Right-side View

Configuration shown is for illustration purposes only

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.co.uk Email: sales@amplicon.co.uk

Ventrix-W 4003

Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Hardware specification	CPU: Intel Pentium 4 3.4GHz 800MHz FSB 2MB cache Main memory: 1GB DDR2 667MHz, dual channel Upgradeable to: 4GB Chipset: Intel Q965 + ICH8DO chipset, supports RAID 0, 1, 5, 10 function Video: Integrated Intel GMA 3000 Graphics LAN: Dual Marvell 88E8053 PCI ExpressTM Gigabit Ethernet controllers RTC: On chip with battery backup Watchdog timer: Programmable by SW: 1 sec.-255 min. and 1 sec. or 1 min./step IO Chip: ITE 81T8718F I/O Controller Display Resolution: Analog display : up to 2048 x 1536 @ 75Hz (QXGA) Flat Panels : up to 2048 x 1536 @ 60 Hz	Mechanical	Design: EIA RS-310C 19" Rackmount Standard Construction: Heavy duty cold rolled electroplated steel Colour: Black (custom colours available for large orders) Dimensions: 483(W) x 177(H) x 510(D) mm (19" x 7" x 20.1") Packaging size: 591(W) x 340(H) x 688(D) mm (23.3" x 13.4" x 27.1") Total drive capacity: 1 x 5.25" + 3 x 3.5" HDD Caddy (SATA, SAS & SCSI320 available) Cooling: 3 x 92mm fan, 51 CFM each Gross weight: approximately 20kg
TFT panel	Screen size: 7.0 inch (diagonal) Adjustment: Brightness, contrast and RGB picture via on-screen display (OSD) Aspect Ratio: 16:9 Input Signal: RK-070-13: VGA (Analogue RGB only) Number of Pixels: 800 (H) x RGB x 480 (V) Pixel Pitch: 0.1905 x 0.1905 mm Active Area: 152.4 (H) x 91.44 (V) View Angle (U / D / L / R): 100 (V), 140 (H) Brightness: 220 nits Contrast Ratio: 400 Response Time: 30 msec Lamp Life: 15,000 hrs	Environmental operational	Acoustic noise: Approximately 49dBA sound pressure at 23°C (typical) Temperature: 0 to 45°C (tested for extended operation up to 50°C) Humidity: 5 to 90% at 25°C non-condensing
Supported graphics modes	Resolution: 800 (H) x 480 (V) (Recommended display mode) Other modes are available, but may not be full screen or centred correctly.	Environmental storage	Temperature: -20 to 65°C Humidity: 5 to 90% at 25°C non-condensing
Keyboard	Manufacturer: Cherry Integrated, high-quality 16 mm trackball Number of keys: 84 (European version), 83 (US version) Extremely flat design Keycaps arranged in 18 mm grid High reliability Gold Crosspoint contacts MTBF: >134,000 hours Individual keys have long service life: approx. 20 million key operations	Electromagnetic compatibility (EMC)	EN55022 Class A EN55024 Industrial severity (where applicable) Electrostatic discharge immunity test (EN61000-4-2) ±4kV Contact, applied to enclosure port ±8kV Air, applied to enclosure port ±4kV Indirect, applied to coupling plane Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3) 80-1000MHz, 10 V/m (RMS, no modulation) 80% Modulation with 1kHz Sine wave Electrical fast transient/burst immunity test (EN61000-4-4) Power port ac, inc. protective earth Severity ±2kV Surge Immunity test (EN61000-4-5) Power port ac Severity ±2kV applied line to line Severity ±2kV applied line to earth Immunity to conducted disturbances induced by radio frequency fields (EN61000-4-6) Power port ac, inc. protective earth via CDN M3 0.15-80MHz, 10 V/m (no modulation) 80% Modulation with 1kHz Sine wave, applied via CDN type M3 Voltage dips, short interrupts and voltages variations immunity tests (EN61000-4-11) Power port ac >95% Reduction, 0.5 Periods >30% Reduction, 25 Periods >95% Reduction, 250 Periods Voltage dips, short interrupts and voltages variations immunity tests (EN61000-6-2) Power port ac >30% Reduction, 0.5 Periods >60% Reduction, 25 Periods >100% Reduction, 250 Periods Limits for harmonic current measurement (EN 61000-3-2), Product Class D Limitation of voltage changes, voltage fluctuations and flicker (EN 61000-3-3) Amplicon own a fully equipped EMC facility and can provide many additional tests to meet your requirements.
BIOS	AMI BIOS, 8Mb Flash EEPROM Plug & Play support Advanced Power Management & Advanced Configuration & Power Interface Support	Safety	Safety of information technology equipment (EN 60950) CE Marked
Storage	250GB SATA RAID Edition HDD 7200rpm DVDRW Total drive capacity: 1 x 5.25" + 3 x 3.5" HDD Caddies (SATA, SAS & SCSI320 available) We can provide storage and backup solutions for any application	Electrical ratings	Voltage: 90 – 264 VAC full range Frequency: 47 – 63Hz Input current: 10.0 / 5.0A for 115 / 230 VAC Inrush current: 80A max PSU maximum secondary loading: 460W* Active PFC EMI noise filter Over power/voltage/current protection Short circuit protection *Higher rated power supplies are available and we recommend that you discuss your power requirements before placing your order
System expansion	Ventrix-W 4003: 4 PCI (full length) and 6 ISA slots (250mm length) Ventrix-W 4004-P12.2: 10 PCI (7 x 250mm length, 3 full length) Additional slots may be freed up by not fitting single board computer I/O brackets	Reliability	System MTBF: >15,000 hrs* (we can provide information for specific configurations) Four hour burn-in diagnostic run on every system *Excludes TFT backlight life of 15,000 hrs
System architecture	Full-sized SBC with PCI / ISA golden finger PICMG 1.0 (Rev 2.0) Compliant PCI V2.2 Compliant		
Supported OS (Operating System)	Windows XP, Windows 2000 (available via Windows XP Pro downgrade rights), Windows Vista. If your desired operating system is not listed, please contact us.		
Internal interfaces	SATA HDD: Serial ATA Ports, bandwidth 300 MB/s x 4 IDE HDD: Ultra ATA100/66/33, 40 pin connector x 1 Floppy: 34-pin connector x 1 USB: On board USB port x 2, USB 2.0 compliant Serial port: 10-pin header x 3 (RS232), 14-pin header x 1 (RS232/422/485) Mouse: Mini-DIN PS/2 x 1 Keyboard: Mini-DIN PS/2 x 1 Digital I/O Port: 4 in and 4 out with TTL level interface x 1 On board buzzer x 1 4-pin for speaker x 1 2-pin header for SMBus 2.0 x 1 IrDA: On board 5 pin header x 1		
LEDs and switches	Power (PC ON) LED Hard disk access LED Front: ATX system control switch, system reset Rear: System ON/OFF power switch		
External interfaces	USB: Front x 2, Rear x 2 Serial: COM1 and COM2 VGA output : DB-15 connector x 1 VGA panel input: DB-15 connector x 1 Front keyboard: Mini-DIN for keyboard only x 1 LAN: RJ45 Ethernet x 2		

14-07-08

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.co.uk Email: sales@amplicon.co.uk