

Ventrix 513



Features

The **Ventrix 510 series** utilises an industrial single board computer and backplane architecture to provide excellent expansion capabilities, easy upgrades, reliability and repeatability.


These models are ideally suited to desktop applications when industrial performance is desired. Additionally these models can be wall mounted by the brackets supplied.

Our production processes are controlled under ISO 9001:2000 and every system undergoes a full diagnostic burn-in prior to shipment.


Systems can be tailored to meet your exact requirements.

Each system comes with a 3 year warranty, with the first year onsite as standard.


Dimensions

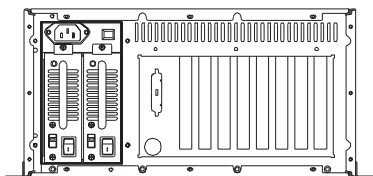


Rear View

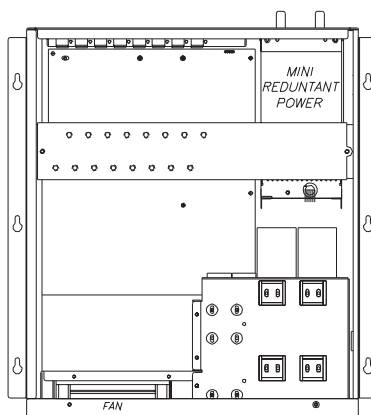

Top View

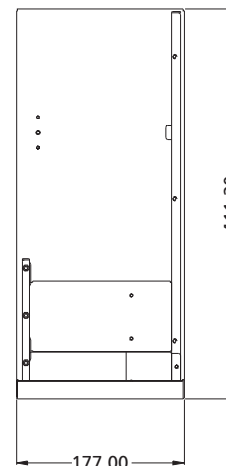

Side View

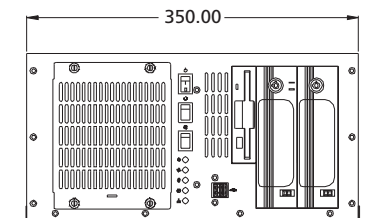

Front View

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.co.uk Email: sales@amplicon.co.uk

Ventrix 513

Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Hardware specification	CPU: Intel Pentium 4 3.4GHz 800MHz FSB 2MB cache Main memory: 1GB DDR2 667MHz, dual channel Upgradeable to: 4GB Chipset: Intel Q965 + ICH8DO chipset, supports RAID 0, 1, 5, 10 function Video: Integrated Intel GMA 3000 Graphics LAN: Dual Marvell 88E8053 PCI Express™ Gigabit Ethernet controllers RTC: On chip with battery backup Watchdog timer: Programmable by SW: 1 sec.–255 min. and 1 sec. or 1 min./step I/O Chip: ITE 8178718F I/O Controller Display Resolution: Analog display : up to 2048 x 1536 @ 75Hz (QXGA) Flat Panels : up to 2048 x 1536 @ 60 Hz	Environmental storage	Temperature: -20 to 65°C Humidity: 5 to 90% at 25°C non-condensing
BIOS	AMI BIOS, 8Mb Flash EEPROM Plug & Play support Advanced Power Management & Advanced Configuration & Power Interface Support	Electromagnetic compatibility (EMC)	EN55022 Class A EN55024 Industrial severity (where applicable) Electrostatic discharge immunity test (EN61000-4-2) ±4kV Contact, applied to enclosure port ±8kV Air, applied to enclosure port ±4kV Indirect, applied to coupling plane Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3) 80-1000MHz, 10 V/m (RMS, no modulation) 80% Modulation with 1kHz Sine wave Electrical fast transient/burst immunity test (EN61000-4-4) Power port ac, inc. protective earth Severity ±2kV Surge Immunity test (EN61000-4-5) Power port ac Severity ±2kV applied line to line Severity ±2kV applied line to earth Immunity to conducted disturbances induced by radio frequency fields (EN61000-4-6) Power port ac, inc. protective earth via CDN M3 0.15-80MHz, 10 V/m (no modulation) 80% Modulation with 1kHz Sine wave, applied via CDN type M3 Voltage dips, short interrupts and voltages variations immunity tests (EN61000-4-11) Power port ac >95% Reduction, 0.5 Periods >30% Reduction, 25 Periods >95% Reduction, 250 Periods Voltage dips, short interrupts and voltages variations immunity tests (EN61000-6-2) Power port ac >30% Reduction, 0.5 Periods >60% Reduction, 25 Periods >100% Reduction, 250 Periods Limits for harmonic current measurement (EN 61000-3-2), Product Class D Limitation of voltage changes, voltage fluctuations and flicker (EN 61000-3-3) Amplicon own a fully equipped EMC facility and can provide many additional tests to meet your requirements.
Storage	250GB SATA RAID Edition HDD 7200rpm DVDRW Total drive capacity: 2 x 5.25", 1 x 3.5" HDD, 1 x 3.5" FDD / HDD We can provide storage and backup solutions for any application	Safety	Safety of information technology equipment (EN 60950) CE Marked
System expansion	Ventrix 513-P7: 5 PCI (3 x full length, 2 x 180mm) Ventrix 513: *2 ISA (full length) and 3 PCI (1 x full length, 2 x 180mm) *Can be increased to up to 4 ISA slots on demand Additional slots may be freed up by omitting or relocating single board computer I/O brackets	Electrical ratings	Voltage: 115 ~ 230 VAC full range Frequency: 50~60Hz Input current: 10.0 / 5.0A for 115 / 230 VAC Inrush current: 50 / 100A max for 115 / 230 VAC PSU maximum secondary loading: 460W* Active PFC Power factor >0.96 at full load Over power / voltage / current protection Short circuit protection *Higher rated power supplies are available and we recommend that you discuss your power requirements before placing your order
System architecture	Full-sized SBC with PCI / ISA golden finger PICMG 1.0 Compliant PCI V2.2 Compliant	Electrical ratings Dual redundant option	Voltage: 90 ~ 264 VAC full range Frequency: 47~63Hz Input current: 8.0 / 4.0A for 115 / 230 VAC Inrush current: 60A / 80A max for 115 / 230 VAC per module PSU maximum secondary loading: 400W* Active PFC Power factor >0.96 at full load Over power / voltage / current protection Short circuit protection Hot-swappable / hot-pluggable Balance load sharing design AC inlet in each module *Higher rated power supplies are available and we recommend that you discuss your power requirements before placing your order
Supported OS (Operating System)	Windows Vista, Windows XP, Windows 2000 (available via Windows XP Pro downgrade rights), Linux Red Hat If your desired operating system is not listed, please contact us.	Reliability	System MTBF: >15,000 hrs (we can provide information for specific configurations) Four hour burn-in diagnostic run on every system
Internal interfaces	SATA HDD: Serial ATA Ports, bandwidth 300 MB/s x 4 IDE HDD: Ultra ATA100/66/33, 40 pin connector x 1 Floppy: 34-pin connector x 1 USB: On board USB port x 2, USB 2.0 compliant Serial port: 10-pin header x 3 (RS232), 14-pin header x 1 (RS232/422/485) Mouse: Mini-DIN PS/2 x 1 Keyboard: Mini-DIN PS/2 x 1 Digital I/O Port: 4 in and 4 out with TTL level interface x 1 On board buzzer x 1 4-pin for speaker x 1 2-pin header for SMBus 2.0 x 1 I2DA: On board 5 pin header x 1		
LEDs and switches	Power (PC ON) LED Hard disk access LED x 2 Environmental temperature warning LED System fan monitor LED x 2 Environmental monitoring buzzer reset Front: ATX system control switch, system reset Rear: System ON / OFF power switch		
External interfaces	USB: Front x 2, Rear x 2 Serial: COM1 and COM2 VGA: DB-15 connector x 1 Front keyboard: Mini-DIN for keyboard only x 1 LAN: RJ45 Ethernet x 2		
Mechanical	Design: Desktop or wall mount Construction: Heavy duty cold rolled electroplated steel Colour: Black (custom colours available for large orders) Dimensions: 350(W) x 177(H) x 411(D) mm (13.8" x 7.0" x 16.2") Packaging size: 490(W) x 324(H) x 558(D) mm (19.3" x 12.8" x 22.0") Total drive capacity: 2 x 5.25", 1 x 3.5" HDD, 1 x 3.5" floppy disk drive Cooling: 1 x 120mm fan, 90 CFM Air filter: removable (washable) Gross weight: approximately 17kg		
Environmental operational	Acoustic noise: 50dBA sound pressure at 23°C (typical) Temperature: 5 to 45°C (tested for extended operation up to 50°C) Humidity: 5 to 90% at 25°C non-condensing Please contact us to discuss extended or harsher environmental specifications		

29-05-08

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.co.uk Email: sales@amplicon.co.uk