

IPC914-210-FL

4-slot Fanless System with Socket Type Intel® Core™2 Duo Processor up to 2.33 GHz, Intel® 945GME Chipset, PCIe and PCI Slots



Front view




Rear view

Features

- Socket M for Intel® Core™2 Duo/Core™ Duo/Celeron® M processor up to 2.33 GHz
- Fanless operation
- Intel® 945GME chipset
- Supports 4 PCI slots or 2 PCI + 1 PCIe x1 + 1 PCIe x16 slots
- DC to DC power supply supports 10-30V
- Compact ID & front I/O design

Wall mount bracket supported

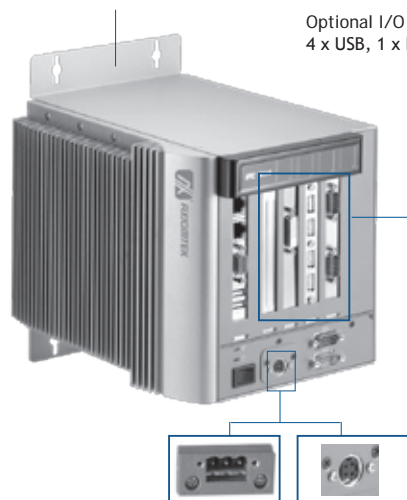

Optional I/O through PCI bracket:
4 x USB, 1 x DVI, 2 x COM




Phoenix plug for DC version Din-jack for AC version

Specifications

Standard Color	Sliver	Expansion Interface	4 x PCI slot (32bits/33MHz) or 2 x PCI & 1 PCIe x1 & 1 PCIe x16	
Construction	Aluminum extrusion heavy-duty cold-rolled steel	Storage	1 x 2.5" SATA HDD	
System Board	SHB210	System Indicators	1 x power on/off, 1 x HDD	
Processor System	CPU Level	Socket M for Intel® Core™2 Duo/Core™ Duo/ Celeron® M processor up to 2.33 GHz	Power Supply	
	Max. Speed	2.33 GHz	DC ATX150W:	
	Front Side Bus	533/667 MHz	Input : 10-30Vac	
	Chipset	Intel® 945GME+ICH7M-DH	Output: +5V@11A, +3.3V@5A, +12V@9A, -12V@-150mA, 5Vsb@2A	
System Memory	2 x 200-pin DDR2 533/677 MHz SODIMM socket, up to 4GB.	AC-DC power adapter:	Input: 90-264Vac	
I/O interface-Front	ATX power on/off switch	Output: 19V@7.89A	Operation Temperature	0°C - +45°C(32°F - 104°F) (with W.T. HDD)
	2 x USB 2.0	Storage Temperature	-20°C - +80°C(-4°F - +113°F)	
	1 x RS-232/422/485 (COM 1)	Humidity	10%-90%, non-condensing	
	1 x RS-232 (COM 2)	Vibration Endurance	2.25 Grms with HDD (5-500Hz,X,Y,Z directions)	
	2 x 10/100/1000Mbps Ethernet	Dimensions	182mm (7.2") (W) x 248mm (9.8") (D) x 185mm (7.3") (H)	
1 x VGA	Weight (net/gross)	5 kg (11.02 lb)/6.4 kg (14.1 lb)	Certification	CE

Dimensions

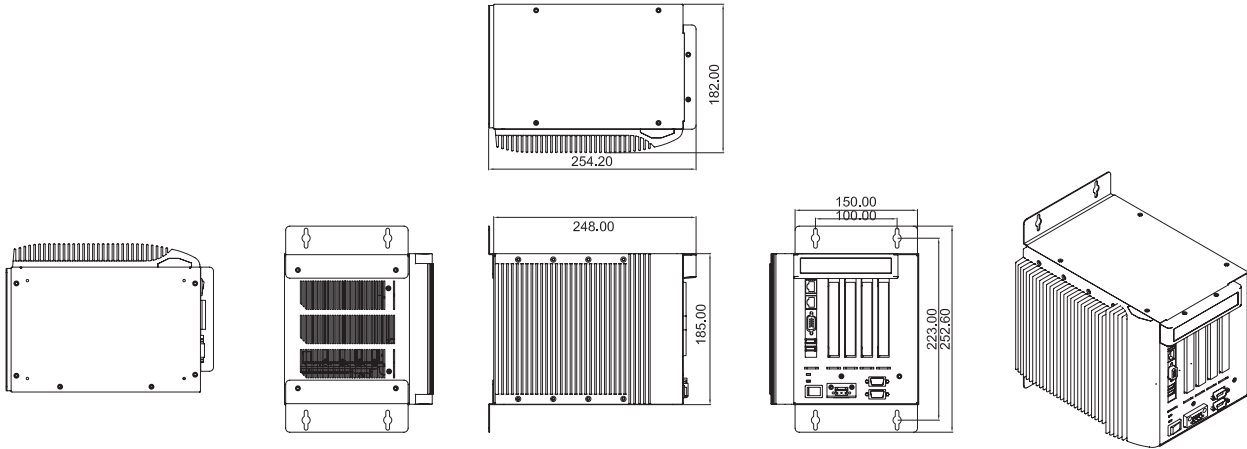

Front Metal Panel I/O Layout

