

Ventrix 4005



Features

The **Ventrix series** utilises an industrial single board computer and backplane architecture to provide excellent expansion capabilities, easy upgrades, reliability and repeatability. The **Ventrix 4005** provides PCI and ISA expansion using PICMG 1.0 technology, and is powered by an Intel Core 2 Duo processor.


Manufactured from selected high quality industrial components, the Ventrix 4000 series is ideal for harsh environments and critical 24/7 operation.

Our production processes are controlled under ISO 9001:2000 and every system undergoes a 4 hour diagnostic burn-in prior to shipment.

Systems can be tailored to meet your exact requirements.

Each system comes with a 3 year warranty, with the first year on-site as standard.

Dimensions

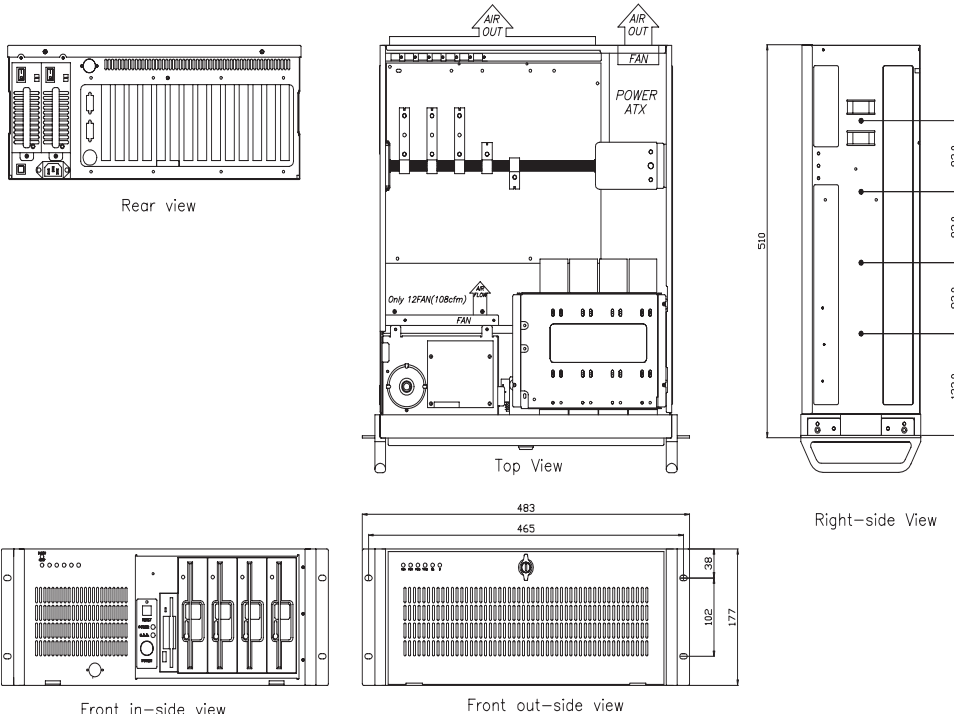

Configuration shown is for illustration purposes only

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.co.uk Email: sales@amplicon.co.uk

Ventrix 4005

Specifications

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Hardware specification	<p>CPU: Intel Core 2 Duo E6420, 2.13GHz, 1066MHz, 4MB cache Main memory: 1GB DDR2 667MHz, dual channel Upgradeable to: 4GB Chipset: Intel Q965 + ICH8DO chipset, supports RAID 0, 1, 5, 10 function Video: Integrated Intel GMA 3000 Graphics LAN: Dual Marvell 88E8053 PCI ExpressTM Gigabit Ethernet controllers RTC: On chip with battery backup Watchdog timer: Programmable by SW: 1 sec.-255 min. and 1 sec. or 1 min./step IO Chip: ITE 81T8718F I/O Controller Display Resolution: Analog display : up to 2048 x 1536 @ 75Hz (QXGA) Flat Panels : up to 2048 x 1536 @ 60 Hz</p>	Electromagnetic compatibility (EMC)	<p>EN55022 Class A EN55024 Industrial severity (where applicable)</p> <p>Electrostatic discharge immunity test (EN61000-4-2) ±4kV Contact, applied to enclosure port ±8kV Air, applied to enclosure port ±4kV Indirect, applied to coupling plane</p> <p>Radiated, radio-frequency, electromagnetic field immunity test (EN61000-4-3) 80-1000MHz, 10 V/m (RMS, no modulation) 80% Modulation with 1kHz Sine wave</p> <p>Electrical fast transient/burst immunity test (EN61000-4-4) Power port ac, inc. protective earth Severity ±2kV</p> <p>Surge Immunity test (EN61000-4-5) Power port ac Severity ±2kV applied line to line Severity ±2kV applied line to earth</p> <p>Immunity to conducted disturbances induced by radio frequency fields (EN61000-4-6) Power port ac, inc. protective earth via CDN M3 0.15-80MHz, 10 V/m (no modulation) 80% Modulation with 1kHz Sine wave, applied via CDN type M3</p> <p>Voltage dips, short interrupts and voltages variations immunity tests (EN61000-4-11) Power port ac >95% Reduction, 0.5 Periods >30% Reduction, 25 Periods >95% Reduction, 250 Periods</p> <p>Voltage dips, short interrupts and voltages variations immunity tests (EN61000-6-2) Power port ac >30% Reduction, 0.5 Periods >60% Reduction, 25 Periods >100% Reduction, 250 Periods</p> <p>Limits for harmonic current measurement (EN 61000-3-2), Product Class D</p> <p>Limitation of voltage changes, voltage fluctuations and flicker (EN 61000-3-3)</p> <p>Amplicon own a fully equipped EMC facility and can provide many additional tests to meet your requirements.</p>
BIOS	<p>AMI BIOS, 8Mb Flash EEPROM Plug & Play support Advanced Power Management and Advanced Configuration & Power Interface Support</p>	Safety	<p>Safety of information technology equipment (EN 60950) CE Marked</p>
Storage	<p>250GB SATA RAID Edition HDD 7200rpm DVDRW Total drive capacity: 4 x 5.25" + 1 x 3.5" floppy disk drive</p> <p>We can provide storage and backup solutions for any application</p>	Electrical ratings	<p>Voltage: 90 ~ 264 VAC full range Frequency: 47~63Hz Input current: 10.0 / 5.0A for 115 / 230 VAC Inrush current: 80A max PSU maximum secondary loading: 460W* Active PFC EMI noise filter Over power / voltage / current protection Short circuit protection</p> <p>*Higher rated power supplies are available and we recommend that you discuss your power requirements before placing your order</p>
System expansion	<p>Ventrix 4005: 4 PCI (full length) and 6 ISA slots (250mm length) Ventrix 4005-P12.2: 10 PCI (7 x 250mm length, 3 full length)</p> <p>Additional slots may be freed up by not fitting single board computer I/O brackets</p>	Electrical ratings Dual redundant option	<p>Voltage: 90 ~ 264 VAC full range Frequency: 47 ~ 63Hz Input current: 9.0 / 4.5A for 115 / 230 VAC Inrush current: 65A / 120A max for 115 / 230 VAC per module PSU maximum secondary loading: 500W* Active PFC Power factor >0.96 at full load Over power / voltage / current protection Short circuit protection Hot-swappable / hot-pluggable Balance load sharing design AC inlet in each module</p> <p>*Higher rated power supplies are available and we recommend that you discuss your power requirements before placing your order</p>
System architecture	<p>Full-sized SBC with PCI / ISA golden finger PICMG 1.0 (Rev 2.0) Compliant PCI V2.2 Compliant</p>	Reliability	<p>System MTBF: >15,000 hrs (we can provide information for specific configurations) Four hour burn-in diagnostic run on every system</p>
Supported OS (Operating System)	<p>Windows Vista, Windows XP, Windows 2000 (available via Windows XP Pro downgrade rights)</p> <p>If your desired operating system is not listed, please contact us.</p>		
Internal interfaces	<p>SATA HDD: Serial ATA Ports, bandwidth 300 MB/s x 4 IDE HDD: Ultra ATA100/66/33, 40 pin connector x 1 Floppy: 34-pin connector x 1 USB: On board USB port x 2, USB 2.0 compliant Serial port: 10-pin header x 3 (RS232), 14-pin header x 1 (RS232/422/485) Mouse: Mini-DIN PS/2 x 1 Keyboard: Mini-DIN PS/2 x 1 Digital I/O Port: 4 in and 4 out with TTL level interface x 1 On board buzzer x 1 4-pin for speaker x 1 2-pin header for SMBus 2.0 x 1 IrDA: On board 5 pin header x 1</p>		
LEDs and switches	<p>Power (PC ON) LED Hard disk access LED Front: ATX system control switch, system reset Rear: System ON/OFF power switch</p>		
External interfaces	<p>USB: Front x 2, Rear x 2 Serial: COM1 and COM2 VGA: DB-15 connector x 1 Front keyboard: Mini-DIN for keyboard only x 1 LAN: RJ45 Ethernet x 2</p>		
Mechanical	<p>Design: EIA RS-310C 19" Rackmount Standard Construction: Heavy duty cold rolled electroplated steel Colour: Black (custom colours available for large orders) Dimensions: 483(W) x 177(H) x 510(D) mm (19" x 7" x 20.1") Packaging size: 600(W) x 345(H) x 690(D) mm (23.6" x 13.6" x 27.2") Cooling: 1 x 120mm fan, 108 CFM Air filter: removable (washable) Gross weight: approximately 20kg</p>		
Environmental operational	<p>Vibration: 5 to 9Hz - 0.3 to 1G ramped, 9 to 500Hz 1G (in acc with 60068-2-6) Shock: 10G 1/2 sine 11ms (in acc with 60068-2-27) Acoustic noise: 49dBa sound pressure at 23°C (typical) Temperature: 5 to 45°C (tested for extended operation up to 50°C) Humidity: 5 to 90% at 25°C non-condensing</p> <p>Please contact us to discuss extended or harsher environmental specifications</p>		
Environmental storage	<p>Temperature: -20 to 65°C Humidity: 5 to 90% at 25°C non-condensing</p>		

03-03-08

Sales: +44 (0) 1273 570 220 Admin: +44 (0) 1273 608 331 Fax: +44 (0) 1273 570 215 Website: www.amplicon.co.uk Email: sales@amplicon.co.uk